


- A. Drain connection 25mm OD x 20mm ID at 1.8m hose
 B. Hot water connection 1/2" B.S.P. at 60°C min. (15-58psi / 100-400kPa)
 C. Electrical Connection 415V/50Hz/3Ph+N+E

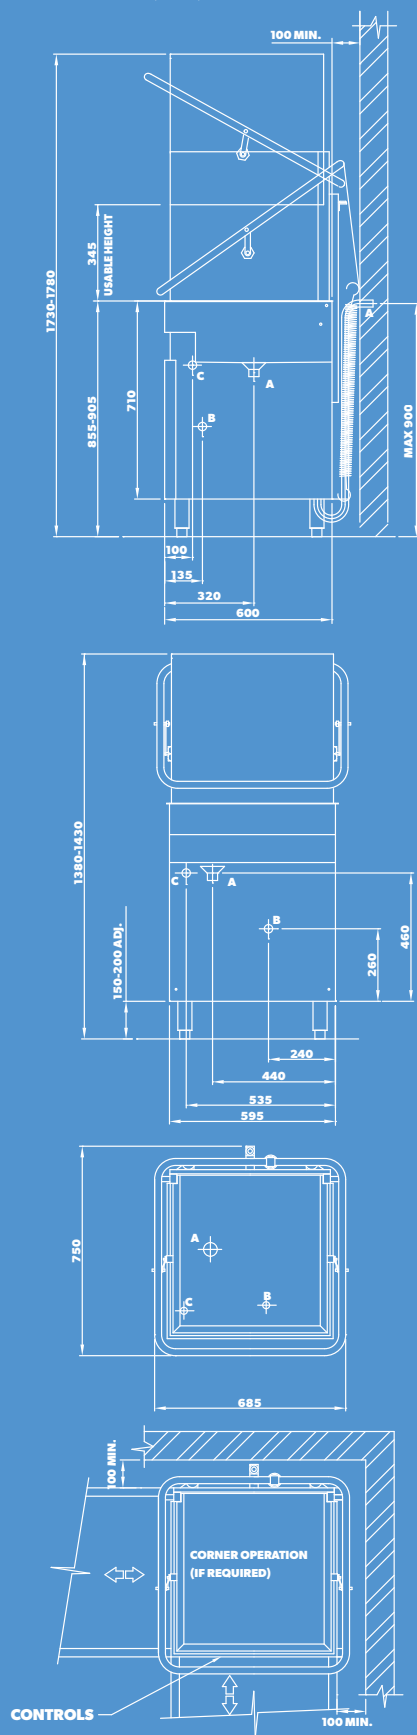

ES32

Pass-Through Recirculating Warewasher

Includes: 2 x plate rack, 1 x cup rack,
1 x cutlery container

E332 Specifications

DIMENSIONS (WxDxH)	595 x 600 x 1405 mm
HEIGHT WITH DOOR OPEN	1755 mm
RACK SIZE (WxD)	500 x 500 mm
ELECTRIC CONNECTION	3 Phase - 415V + N + E
RATING	9.5 kW
WATER SUPPLY	60°C / 1-4 bar (15-58 psi)
MEAL SERVICE	60 - 130 pax (32 racks/hr)
WASH CYCLE	90 sec 120 sec
DETERGENT PUMP	Fitted
RINSE AID PUMP	Fitted
DRAIN PUMP	Fitted
WATER CONSUMPTION	3.5L cycle
TANK CAPACITY	30L
WEIGHT	103 kg
PACKED	0.5 m ³
WATERMARK APPROVAL	WM-022833
HACCP APPROVAL	PE-388-GE-09

Dimensions may change without notice in accordance with product development and design

Proudly Distributed By

eswood.com.au

211-217 Woodpark Road SMITHFIELD NSW 2164

T: 1800 013 123

E: sales@middleby.com.au