


- A. Drain Connection 20mm ID Hose
 B. Water Connection 3/4" x 1.5 Braided Hose
 C. Electrical Connection 3 phase (415V/50Hz/3ph+N+E)

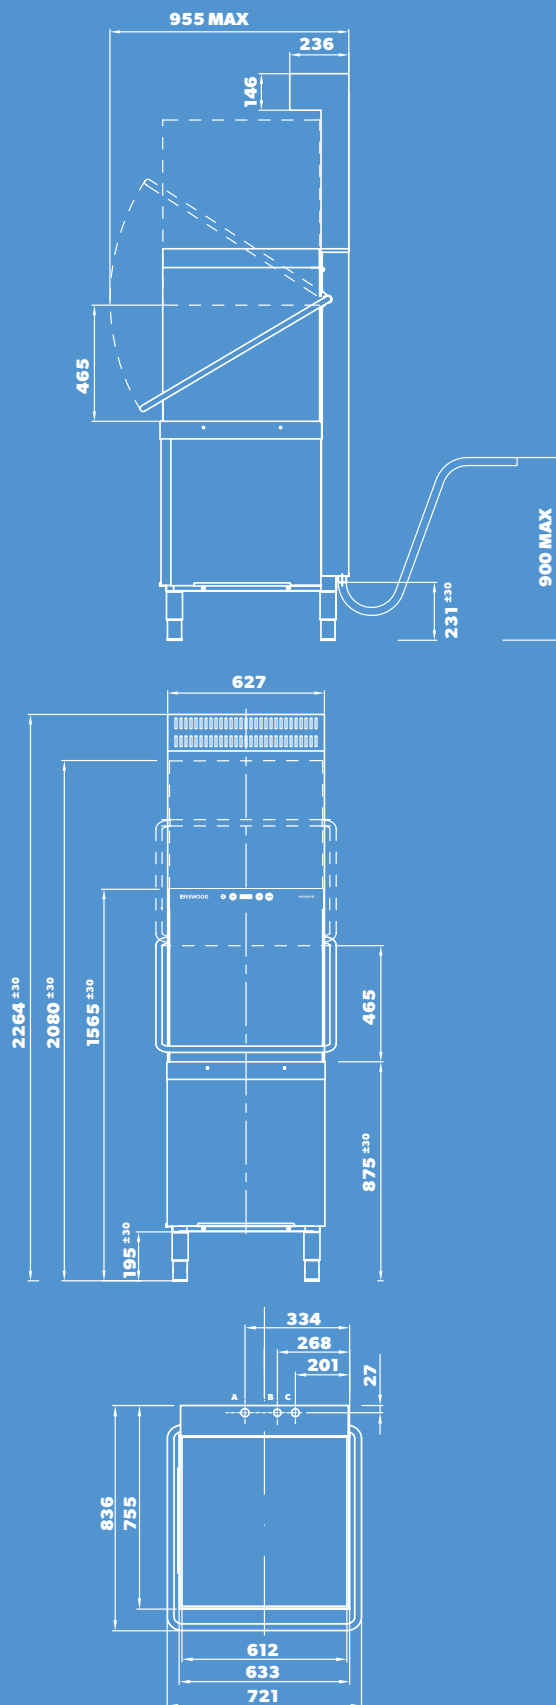

SW900V

Profesional Pass-through Warewasher

SW900V Specifications

DIMENSIONS (WXDXH)	633 x 755 x 2264 mm
HOOD CONSTRUCTION	Double-skinned
HOOD OPENING	465 mm
HOOD LIFT SYSTEM	ProGlide (3 kg)
HOOD LIFT HANDLE	All-around
WASH CHAMBER	TotalClean – Pipe Free
RACK STAND CONSTRUCTION	S/S wire hinged
TANK VOLUME	22 litres
TANK CONSTRUCTION	Deep drawn
TANK HEATING ELEMENT	2,5 kW
WASH PUMP TYPE	Double flow
WASH PUMP POWER	700 W
RINSE SYSTEM	SmartRinse
RINSE BOOSTER PUMP	Fitted
SELF DIAGNOSTIC SYSTEM	Fitted
BOILER HEATING ELEMENT	9.5 kW
FRESH WATER CONSUMPTION	2,3 lt/rack
DRAIN SYSTEM	SmartDrain (partial drain)
DRAIN PUMP	Fitted
DOSING SYSTEM	ProDose electr. Controlled
DETERGENT & RINSE AID PUMP	Fitted
TOTAL ELECTRIC LOAD AT 415V (3PH+N+E)	10,2 kW
WASH CYCLES	60, 90, 120 sec
SPECIAL CYCLES	3
SELF CLEANING CYCLE	YES
WATERMARK APPROVAL	WMKT25317
HACCP APPROVAL	PE-388-GE-09

Dimensions may change without notice in accordance with product development and design

Proudly Distributed By

eswood.com.au

211–217 Woodpark Road SMITHFIELD NSW 2164

T: 1800 013 123

E: sales@middleby.com.au