


Item: _____

Quantity: _____

Project: _____

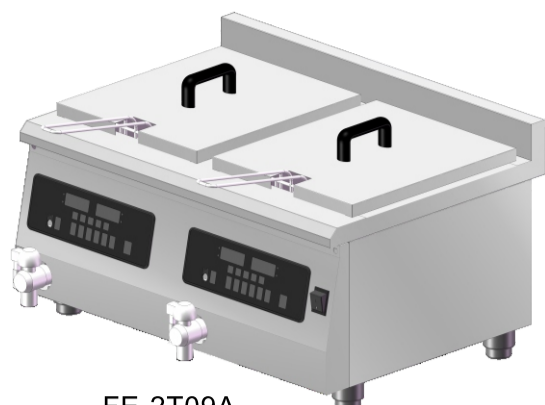

FE-2T09A

DESCRIPTION

Quickly, easily, precisely, and safely cook with high efficient heavy-duty freestanding induction range! Perfect for catering and restaurant thanks to its compact, low-profiled freestanding design, this unit relies on ultra-efficient induction technology to fry food products.

This process is flame less and heats only the pan and its contents, making it an incredibly safe and cool range. Plus, this particular unit is outfitted with a sensor that prevents operation unless a proper pan designed for induction use is placed on top, which helps to ensure a safe, effective cooking environment at all times.

The induction fryer is equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off

Models

FE-2T09A Double Tank Induction Fryer

FEATURES

- German IGBT
- Stainless steel framed hobs
- Overheat system protection
- Commercial high-flow fans
- 90% efficiency rating
- Stainless steel feet for support

MANUAL CONTROL MODELS

- Pushbutton Control
- Temperature Range, Max. 240C
- Timer Range, 0-180 minutes
- Cooking mode, 1-6
- Volume, 9L - 13L + 9L - 13L

IMPORTANT


This appliance is intended for use with induction-ready cookware. All units requires a minimum clearance of four 4"(101.6mm) between all sides of the housing and any surface or obstacle. Avoid ambient temperatures exceeding 50C / 122F.

WARRANTY:


All models show come with FOOD EQUIPMENT’s standard warranty against defects in materials and workmanship,

Due to continued product improvement, please counsult www.foodequipment.co.nz for current product specifications.


FE-2T09A Double Tank Induction Fryer

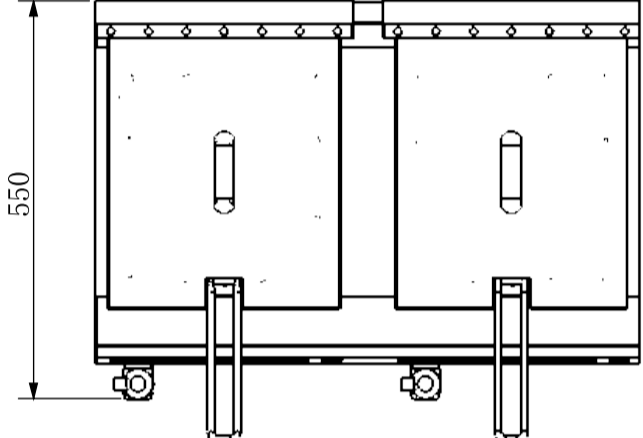

Top View

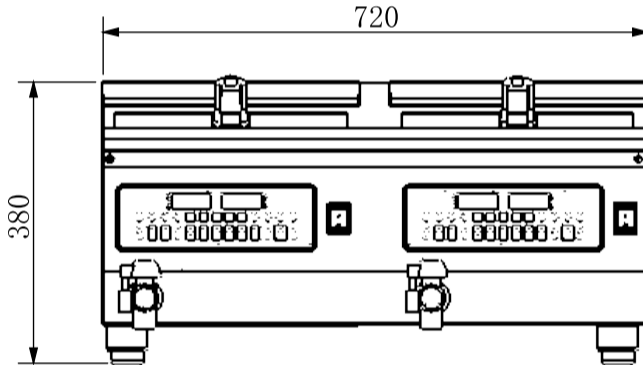

Front View

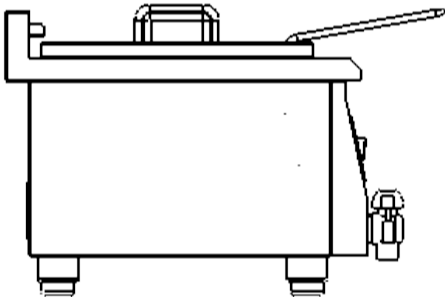


Side View

MODEL	DESCRIPTION	OVERALL DIMENSIONS			VOLTS	Hz	WATTS	PLUG	SHIP WEIGHT
		LENGTH	DEPTH	HIGHT					
FE-2T09A	Induction Fryer	720mm	550mm	380mm	240V	50Hz	3500W+3500W	/	25.1 KGS

Plug Configurations		
Model	Electrical Characteristics	Plug
FE-2T09A	220V/50Hz 3500W+3500W	

Control Panel

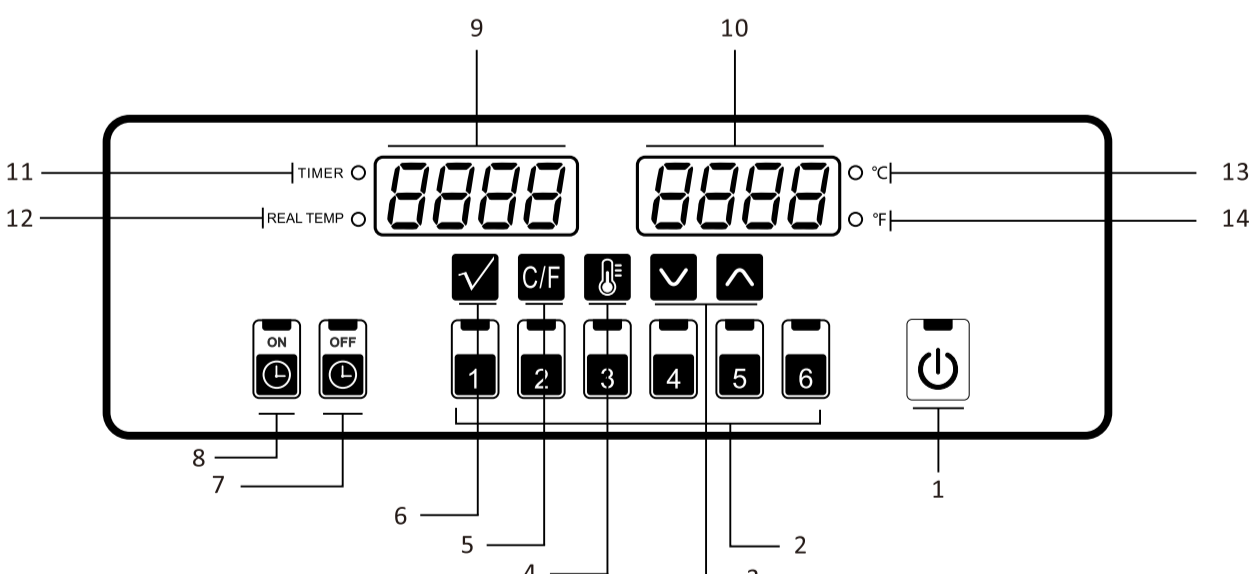

- 1. Power ON/OFF key
- 2. Timer Mode
- 3. Decrease Button
- 4. Increase Button
- 5. Temperature /Setpoint Switch
- 6. Centigrade /Fahrenhelt Switch
- 7. Program Mode Switch
- 8. Timed Shutdown
- 9. Appointment Boot
- 10. LED for Display Real-time Temp
- 11. LED for Display Setting Temperature
- 12. Timer Indicator Light
- 13. Real-time Indicator Light
- 14. Centigrade Indicator Light
- 15. Fahrenhelt Indicator Light